

EUROLITE VLS-600RGY 30k Showlaser

No. 51741445



No. 51741490..... EUROLITE NOT-20 Laser interlock

- + Effects: layers, grids, tunnels, waves, writing, graphics, animation
- + Laser safety by integrated scan control, interlock with mechanic shutter, key switch for locking startup
- + Red-green showlaser (laser diode: 650 nm red, 532 nm green)
- + Laser with the classification 4
- + Operation: ILDA, DMX512, auto, sound-active

NEW

DMX

ILDA

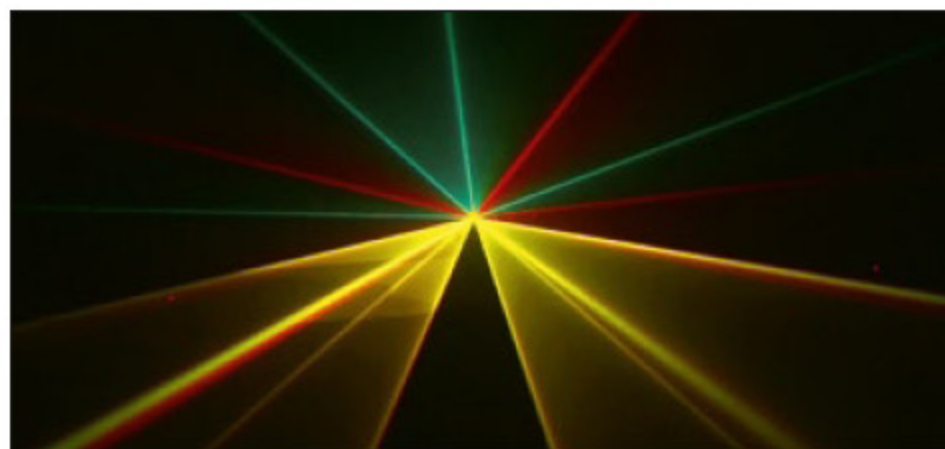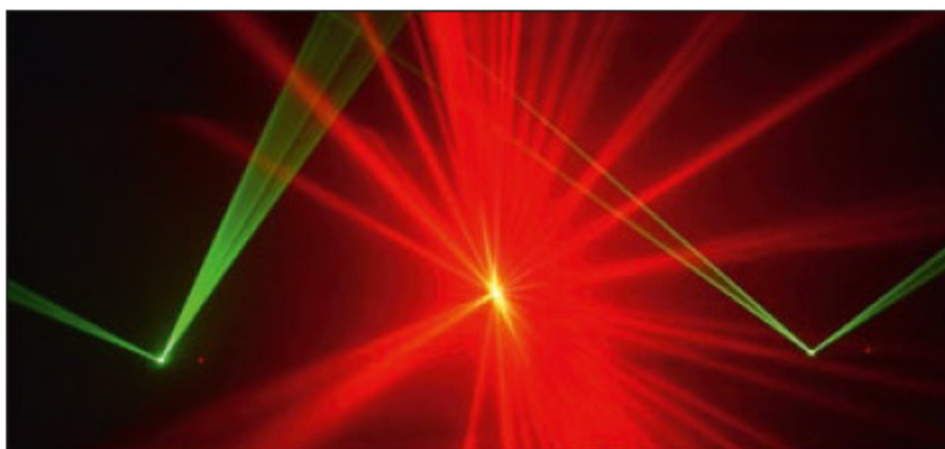

• Laser with the classification 4 • Red, green, yellow color-mixture • Operation: ILDA, DMX512, auto, sound-active • Effects: layers, grids, tunnels, waves, writing, graphics, animation • Laser diode: 650 nm red, 532 nm green • For DMX-operation on the rear panel: X and Y size adjustment • Laser safety by integrated scan control, interlock with mechanic shutter, key switch for locking startup • Read user manual before use. Laser installation, alignment and operation only by qualified and trained personell! Never open the housing!



Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	45 W
DMX control channels:	13
DMX512 connection:	3-pin XLR
ILDA-connection:	25-pin SUB-D
Maximum optical power:	600 mW
Laser classification:	4
Wavelength:	650/532 nm
Laser-modules:	Red 500 mW, green 100 mW
Beam:	5 mm @ output
Scanning speed:	30000 pps @ 8°
Dimensions without bracket (LxWxH):	440 x 320 x 205 mm
Weight:	9 kg

Accessories:

EUROLITE NOT-20 Laser interlock	No. 51741490
ILDA cable 20m	No. 51741495
EUROLITE HE Laser software	No. 51885500
EUROLITE Laser interface	No. 51885505
Pangolin QuickShow 2.0 FB3/QS	No. 51885510
Saveking Safety bond 3x1000 silver	No. 58010254